

LOCATION

1:2000

CS	BR	DMcl	2022.10.07
Dwn.	Dsgn.	Chkd.	YYYY.MM.DD

Issue Status

PRELIMINARY

This document is suitable only for the purpose noted above. Use of this document for any other purpose is not permitted.

Client/Project Logo



Client/Project
MORAY COUNCIL
CYCLING, WALKING AND SAFER ROUTES

ST LEONARDS

Title
GENERAL ARRANGEMENT OPTION 2



ST LEONARDS

Project No.	Scale
332010758	AS SHOWN
Revision	Drawing No.

P0.1 **10758-STN-00-SL-DR-D-0002**

ROAD MARKING SCHEDULE

DIAGRAM NO.	LINE TYPE	SIZE
1003A	GIVE WAY	600mm LINE, 300 GAP, 200mm WIDE
1004	WARNING LINE	400mm LINE, 2000 GAP, 100mm WIDE
1023A	GIVE WAY TRIANGLE	3750mm LONG, 1250mm WIDE

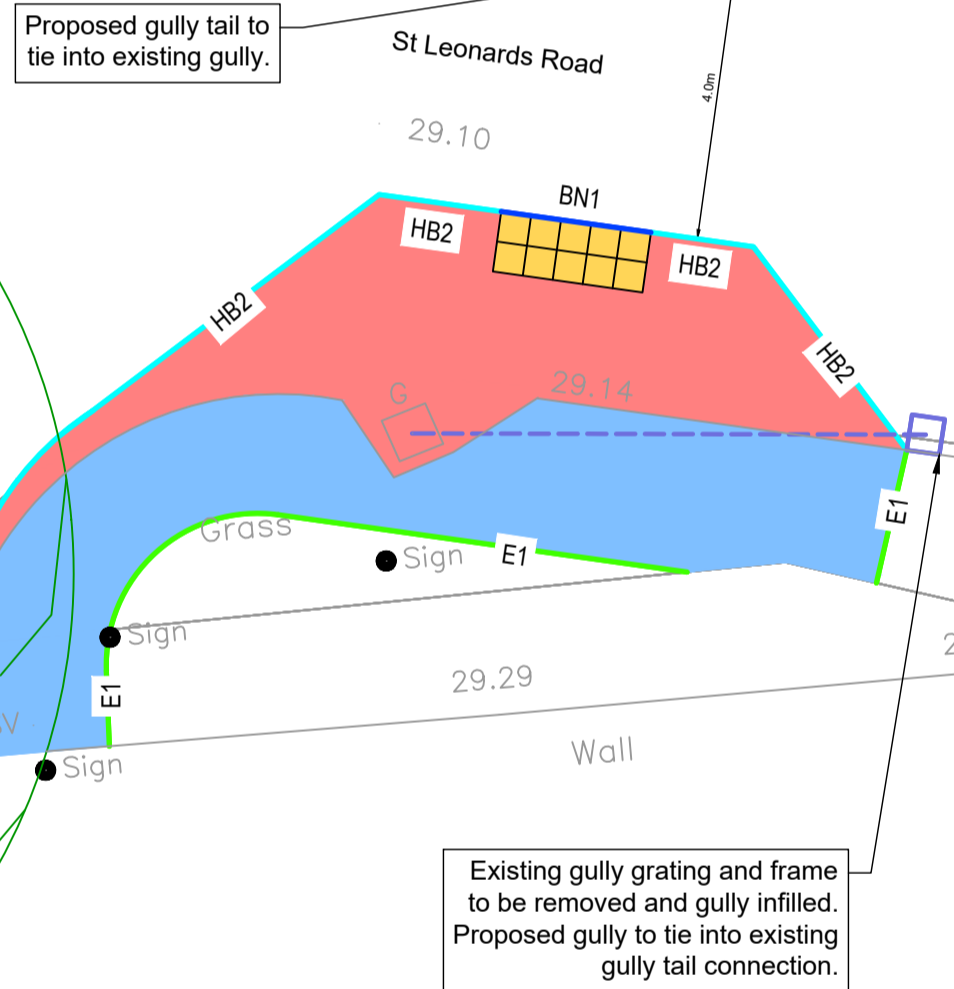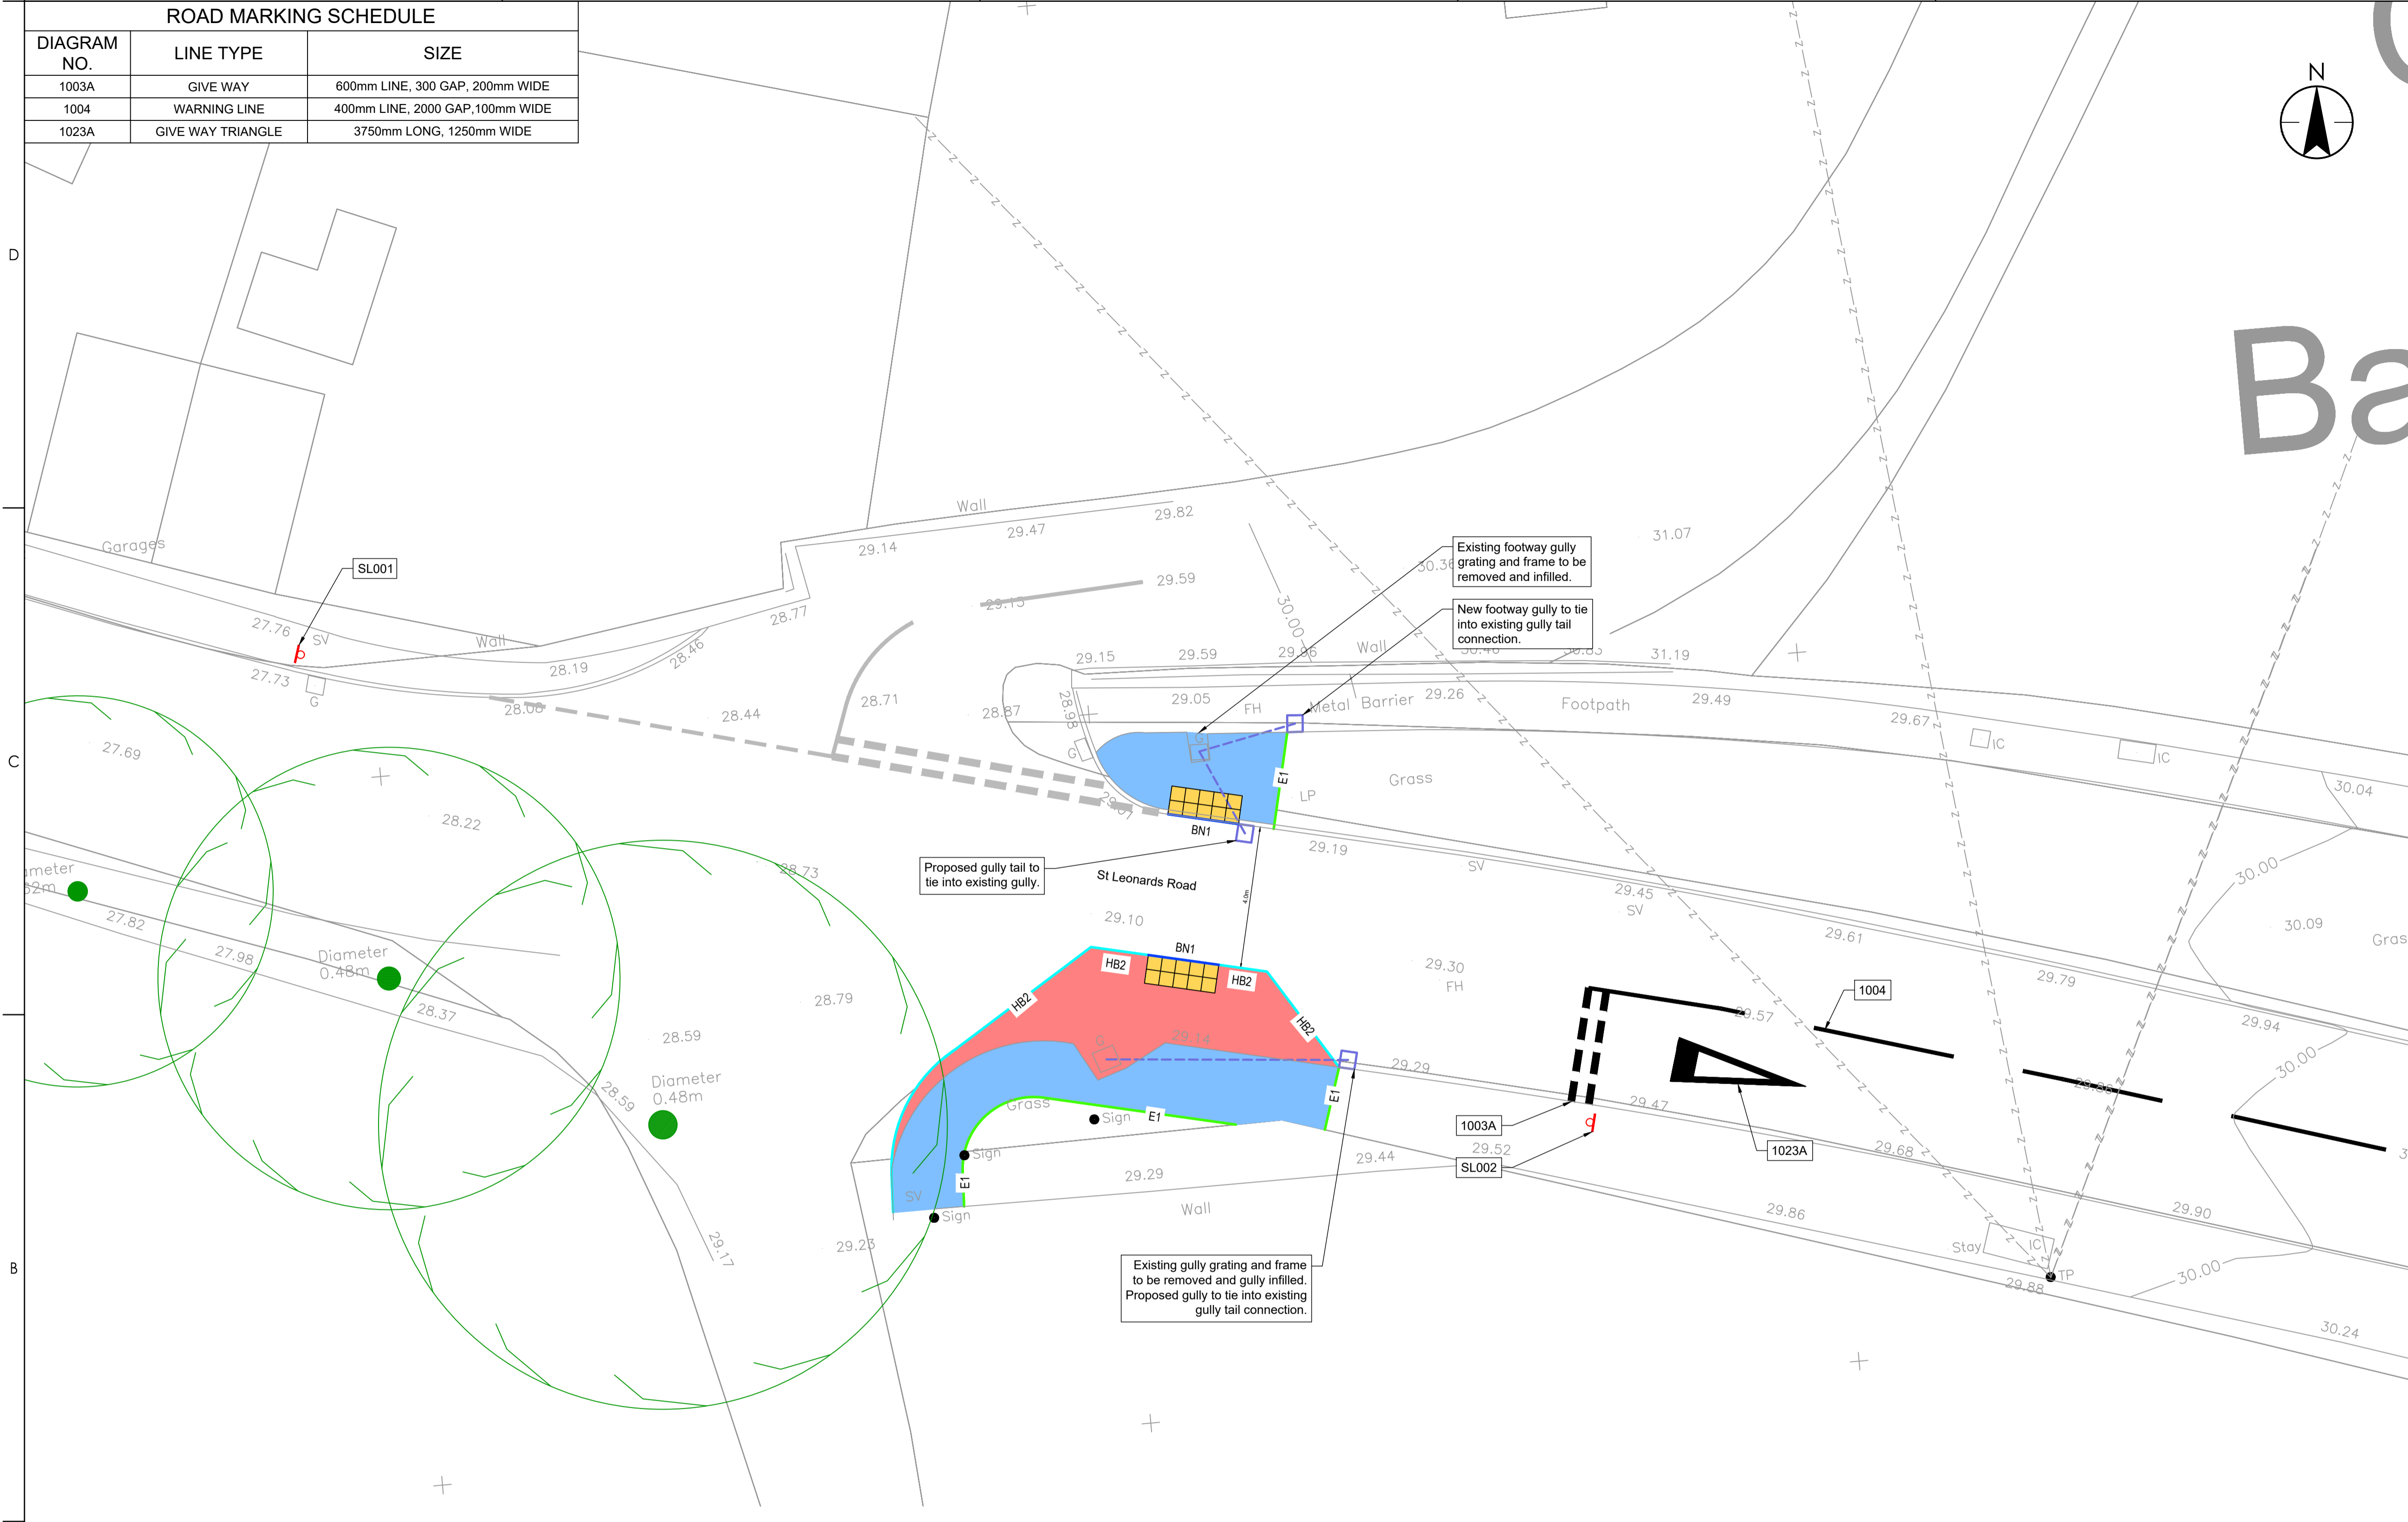

SL001 (DIAGRAM NO. 811A) SIGN DETAIL



SL002 (DIAGRAM NO. 615) SIGN DETAIL

LEGEND

	PRECAST CONCRETE BULL NOSE KERB - 6mm UPSTAND (BN1)
	PRECAST CONCRETE EDGING KERB - FLUSH (E1)
	PRECAST CONCRETE HALF BATTER KERB - (HB2)
	BUFF TACTILE PAVING
	NEW GULLY
	150mmØ HDPE GULLY TAIL
	ROAD SIGN

PAVEMENT MAKEUP

	FOOTWAY F1	
	NEW FOOTWAY CONSTRUCTION	
	60mm SURFACE COURSE:	AC 10 CLOSE SURF 100/150 TO CL. 912
	150mm SUB-BASE:	TYPE 1 TO CL. 803
	FOOTWAY F4	
	CARRIAGEWAY TO FOOTWAY CONSTRUCTION	
	60mm SURFACE COURSE:	AC 6 DENSE SURF 100/150 TO CL. 909
	40mm BINDER COURSE:	AC 20 DENSE BIN 40/60 REC. TO CL. 906

