

SWMH6
C.L.: 169.000
I.L.: 167.900

SWMH7
C.L.: 169.200
I.L.: 167.400

SWMH10
C.L.: 170.100
I.L.: 168.530

FWMH2
C.L.: 170.020
I.L.: 168.020

SWMH8
C.L.: 168.680
I.L.: 166.400

FWMH5
C.L.: 168.680
I.L.: 165.730

SWMH9
C.L.: 166.500
I.L.: 164.935

FWMH6
C.L.: 165.460
I.L.: 164.300

Soakaway SW1
C.L.: 163.500
I.L. in: 162.300
Base: 159.000


Soakaway SW2
C.L.: 163.500
I.L. in: 162.200
Base: 153.000

FWMH7
C.L.: 158.950
I.L. (In): 157.800
I.L. (Out): 156.950

Invert Level of
Ex MH to be checked
on site prior to work

1.2m where possible

Use D400 Cover & Frame to comply
with BS EN 124 and set 6mm
below road surface.

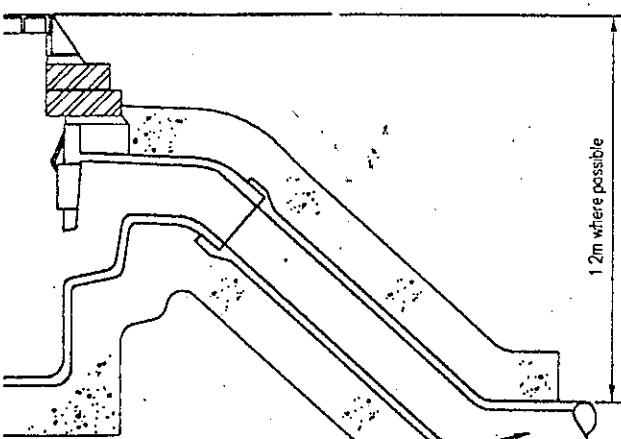

Use D400 Cover & Frame to comply
with BS EN 124 and set 6mm
below road surface.